

产品特点 Features of product

- 组合式电柜，适宜并柜使用
- 顶板可以移去，侧板可以拆卸，更易于工作的便捷性
- 门板离地很高，约25mm，确保开门灵活顺畅
- 独特的九折型材整体焊接而成的主体框架不但确保柜体的高强度而且使柜体的防护等级达到IP56
- 特殊的门板方管加强系统可以用螺丝固定在门板上，便于拆卸
- 框架上密布的25mm 间距模数孔确保安装的灵活性、通用性
- 镀锌安装板可以利用塑料滑块通过导轨从正面推入柜内，且两边有U型折边使安装板更牢固和更便于搬运
- Combined electric cabinet, suitable for combination
- The top plate is removable and the side plate is demountable, making work easier and simpler
- Ground clearance of door plate is sufficient, about 25mm, ensuring flexibility and smoothness of door opening.
- IP56The main body frame specially made of nine-fold section by means of whole welding not only ensures high strength of cabinet body but also lets the protection grade of cabinet body reach IP56.
- Special door plate square pipe reinforcement system can be fixed on the door plate with screws, easy for dismantlement.
- Module holes densely distributed at 25mm spacing on the frame guarantee the flexibility and universality of installation
- The mounting plate can be pushed into the cabinet from the front through guide rail by making use of plastic sliders. U-shape folded edges at the two sides facilitate fastening and handling of the mounting plate.

KP系列订货规格表

KP series order specification table

*可定制非标产品
Nonstandard products are customizable

序号 No.	柜体订货号(RAL7032) Order number of cabinet body (RAL7032)	侧板订货号(RAL7032) Order number of side plate (RAL7032)	柜体订货号(RAL7035) Order number of cabinet body (RAL7035)	侧板订货号(RAL7035) Order number of side plate (RAL7035)	宽 Width	高 Height	深 Depth
1	KP601840002	KP1840002	KP601840005	KP1840005	600	1800	400
2	KP801840002	KP1840002	KP801840005	KP1840005	800	1800	400
3	KP101840002	KP1840002	KP101840005	KP1840005	1000	1800	400
4	KP121840002	KP1840002	KP121840005	KP1840005	1200	1800	400
5	KP601850002	KP1850002	KP601850005	KP1850005	600	1800	500
6	KP801850002	KP1850002	KP801850005	KP1850005	800	1800	500
7	KP121850002	KP1850002	KP121850005	KP1850005	1200	1800	500
8	KP601860002	KP1860002	KP601860005	KP1860005	600	1800	600
9	KP801860002	KP1860002	KP801860005	KP1860005	800	1800	600
10	KP121860002	KP1860002	KP121860005	KP1860005	1200	1800	600
11	KP602040002	KP2040002	KP602040005	KP2040005	600	2000	400
12	KP802040002	KP2040002	KP802040005	KP2040005	800	2000	400
13	KP122040002	KP2040002	KP122040005	KP2040005	1200	2000	400
14	KP602050002	KP2050002	KP602050005	KP2050005	600	2000	500
15	KP802050002	KP2050002	KP802050005	KP2050005	800	2000	500
16	KP102050002	KP2050002	KP102050005	KP2050005	1000	2000	500
17	KP122050002	KP2050002	KP122050005	KP2050005	1200	2000	500
18	KP602060002	KP2060002	KP602060005	KP2060005	600	2000	600
19	KP802060002	KP2060002	KP802060005	KP2060005	800	2000	600
20	KP102060002	KP2060002	KP102060005	KP2060005	1000	2000	600
21	KP122060002	KP2060002	KP122060005	KP2060005	1200	2000	600
22	KP602080002	KP2080002	KP602080005	KP2080005	600	2000	800
23	KP802080002	KP2080002	KP802080005	KP2080005	800	2000	800
24	KP122080002	KP2080002	KP122080005	KP2080005	1200	2000	800
25	KP602260002	KP2260002	KP602260005	KP2260005	600	2200	600
26	KP802260002	KP2260002	KP802260005	KP2260005	800	2200	600
27	KP122260002	KP2260002	KP122260005	KP2260005	1200	2200	600

*KP系列细节图见47页 *See Page 47 for KP Series Detail Drawing

BKP不锈钢组合柜系列

BKP stainless steel combined cabinet series



材料 Material	SUS304 (其它材料型号可选)SUS304 (other material types are optional)
表面处理 Surface treatment	拉丝，安装板则为镀锌Wire drawing, and mounting plate is galvanized
防护等级 Protection grade	IP54 (按GB4205-1993) IP54 (in accordance with GB4205-1993)
标准配置 Standard configuration	前门、背板、安装板、柜体、密封条、门锁、侧板(可选件)Front door, back plate, mounting plate, cabinet body, sealing strip, door lock and side plate (optional)
钢板厚度 Plate thickness	框架：九折型材1.5mm 门板：2.0mm 背板、侧板：1.5mm 安装板：2.5mm Frame: nine-fold section 1.5mm Door plate: 2.0mm Back plate and side plate: 1.5mm Mounting plate: 2.5mm



限位器/铰链/加强方管
Stopper/hinge/
reinforced square pipe



固定底座
Fixing base



不锈钢三通连接件
Stainless steel three-way
connection element

产品特点 Features of product

- 组合式电柜，适宜并柜使用
- 顶板可以移去，侧板可以脱卸，更易于工作的便捷性
- 门板离地很高，约25mm，确保开门灵活顺畅
- 独特的九折型材配合高强度的不锈钢三通连接件焊接而成的主体框架确保柜体的高强度
- 特殊的门板方管加强系统可以用螺丝固定在门板上，便于拆卸
- 框架上密布的25mm 间距模数孔确保安装的灵活性、通用性
- 镀锌安装板可以利用塑料滑块通过导轨从正面推入柜内，且两边有U型折边使安装板更牢固和更便于搬运
- 专业的不锈钢岔道锁、不锈钢承重吊环以及各种功能性的附件彰显柜体豪华品质

- Combined electric cabinet, suitable for combination
- The top plate is removable and the side plate is demountable, making work easier and simpler
- Ground clearance of door plate is sufficient, about 25mm, ensuring flexibility and smoothness of door opening.
- The main body frame specially made of nine-fold section and high-strength stainless steel three-way connection elements through welding ensures high strength of cabinet body.
- Special door plate square pipe reinforcement system can be fixed on the door plate with screws, easy for dismantlement.
- Module holes densely distributed at 25mm spacing on the frame guarantee the flexibility and universality of installation
- The mounting plate can be pushed into the cabinet from the front through guide rail by making use of plastic sliders. U-shape folded edges at the two sides facilitate fastening and handling of the mounting plate.
- Professional stainless steel turnoff lock, stainless steel bearing suspension loops and other accessories of various functions bring out luxury character of cabinet body.

BKP系列订货规格表 BKP series order specification table


*可定制非标产品
Nonstandard products are customizable

序号/No.	柜体订货号 Order number of cabinet body	侧板订货号 Order number of side plate	宽 Width	高 Height	深 Depth
1	BKP6018400304	BKP18400304	600	1800	400
2	BKP8018400304	BKP18400304	800	1800	400
3	BKP1018400304	BKP18400304	1000	1800	400
4	BKP1218400304	BKP18400304	1200	1800	400
5	BKP6018500304	BKP18500304	600	1800	500
6	BKP8018500304	BKP18500304	800	1800	500
7	BKP1218500304	BKP18500304	1200	1800	500
8	BKP6018600304	BKP18600304	600	1800	600
9	BKP8018600304	BKP18600304	800	1800	600
10	BKP1218600304	BKP18600304	1200	1800	600
11	BKP6020400304	BKP20400304	600	2000	400
12	BKP8020400304	BKP20400304	800	2000	400
13	BKP1220400304	BKP20400304	1200	2000	400
14	BKP6020500304	BKP20500304	600	2000	500
15	BKP8020500304	BKP20500304	800	2000	500
16	BKP1020500304	BKP20500304	1000	2000	500
17	BKP1220500304	BKP20500304	1200	2000	500
18	BKP6020600304	BKP20600304	600	2000	600
19	BKP8020600304	BKP20600304	800	2000	600
20	BKP1020600304	BKP20600304	1000	2000	600
21	BKP1220600304	BKP20600304	1200	2000	600
22	BKP6020800304	BKP20800304	600	2000	800
23	BKP8020800304	BKP20800304	800	2000	800
24	BKP1220800304	BKP20800304	1200	2000	800
25	BKP6022600304	BKP22600304	600	2200	600
26	BKP8022600304	BKP22600304	800	2200	600
27	BKP1222600304	BKP22600304	1200	2200	600

KP/BKP系列尺寸规格表 KP/BKP series dimension table

规格尺寸 Dimension			宽度 Width							高度 Height							深度 Depth							安装板 Mounting plate			
宽 Width	高 Height	深 Depth	B1	B2	B3	B5	B6	B7	B8	B9	H1	H2	H3	H5	H6	H7	H8	H9	T1	T2	T3	T4	T5	T6	T7	F	G
600	1800	400	599	592	512	475	455	475	535	401	1805	1775	1712	1675	1650	1630	1600	898	402	275	302	349	269	349-149	325	499	1696
600	1800	500	599	592	512	475	455	475	535	401	1805	1775	1712	1675	1650	1630	1600	898	502	375	402	449	369	449-149	425	499	1696
600	1800	600	599	592	512	475	455	475	535	401	1805	1775	1712	1675	1650	1630	1600	898	602	475	502	549	469	549-149	525	499	1696
600	2000	400	599	592	512	475	455	475	535	401	2005	1975	1912	1875	1850	1830	1800	998	402	275	302	349	269	349-149	325	499	1896
600	2000	500	599	592	512	475	455	475	535	401	2005	1975	1912	1875	1850	1830	1800	998	502	375	402	449	369	449-149	425	499	1896
600	2000	600	599	592	512	475	455	475	535	401	2005	1975	1912	1875	1850	1830	1800	998	602	475	502	549	469	549-149	525	499	1896
600	2000	800	599	592	512	475	455	475	535	401	2005	1975	1912	1875	1850	1830	1800	998	802	675	702	749	669	649-149	725	499	1896
600	2200	600	599	592	512	475	455	475	535	401	2205	2175	2112	2075	2050	2030	2000	1098	602	475	502	549	469	549-149	525	499	2096
800	1800	400	799	792	712	675	655	675	735	601	1805	1775	1712	1675	1650	1630	1600	898	402	275	302	349	269	349-149	325	699	1696
800	1800	500	799	792	712	675	655	675	735	601	1805	1775	1712	1675	1650	1630	1600	898	502	375	402	449	369	449-149	425	699	1696
800	1800	600	799	792	712	675	655	675	735	601	1805	1775	1712	1675	1650	1630	1600	898	602	475	502	549	469	549-149	525	699	1696
800	2000	400	799	792	712	675	655	675	735	601	2005	1975	1912	1875	1850	1830	1800	998	402	275	302	349	269	349-149	325	699	1896
800	2000	500	799	792	712	675	655	675	735	601	2005	1975	1912	1875	1850	1830	1800	998	502	375	402	449	369	449-149	425	699	1896
800	2000	600	799	792	712	675	655	675	735	601	2005	1975	1912	1875	1850	1830	1800	998	602	475	502	549	469	549-149	525	699	1896
800	2000	800	799	792	712	675	655	675	735	601	2005	1975	1912	1875	1850	1830	1800	998	802	675	702	749	669	649-149	725	699	1896
800	2200	600	799	792	712	675	655	675	735	601	2205	2175	2112	2075	2050	2030	2000	1098	602	475	502	549	469	549-149	525	699	2096
1000	1800	400	999	992	912	875	855	875	935	801	1805	1775	1712	1675	1650	1630	1600	898	402	275	302	349	269	349-149	325	899	1696
1200	1800	400	1199	1192	1112	1075	1055	1075	1135	881	1805	1775	1712	1675	1650	1630	1600	898	402	275	302	349	269	349-149	325	1099	1696
1200	1800	500	1199	1192	1112	1075	1055	1075	1135	881	1805	1775	1712	1675	1650	1630	1600	898	502	375	402	449	369	449-149	425	1099	1696
1200	1800	600	1199	1192	1112	1075	1055	1075	1135	881	1805	1775	1712	1675	1650	1630	1600	898	602	475	502	549	469	549-149	525	1099	1696
1200	2000	400	1199	1192	1112	1075	1055	1075	1135	881	2005	1975	1912	1875	1850	1830	1800	998	402	275	302	349	269	349-149	325	1099	1896
1200	2000	500	1199	1192	1112	1075	1055	1075	1135	881	2005	1975	1912	1875	1850	1830	1800	998	502	375	402	449	369	449-149	425	1099	1896
1200	2000	600	1199	1192	1112	1075	1055	1075	1135	881	2005	1975	1912	1875	1850	1830	1800	998	602	475	502	549	469	549-149	525	1099	1896
1200	2000	800	1199	1192	1112	1075	1055	1075	1135	881	2005	1975	1912	1875	1850	1830	1800	998	802	675	702	749	669	649-149	725	1099	1896
1200	2200	600	1199	1192	1112	1075	1055	1075	1135	881	2205	2175	2112	2075	2050	2030	2000	1098	602	475	502	549	469	549-149	525	1099	2096
1000	2000	500	999	492	912	875	355	375	935	801	2005	1975	1912	1875	1850	1830	1800	998	502	375	402	449	369	449-149	425	899	1896
1000	2000	600	999	492	912	875	355	375	935	801	2005	1975	1912	1875	1850	1830	1800	998	602	475	502	549	469	549-149	525	899	1896

KP/BKP系列细节图
KP/BKP series detail drawing

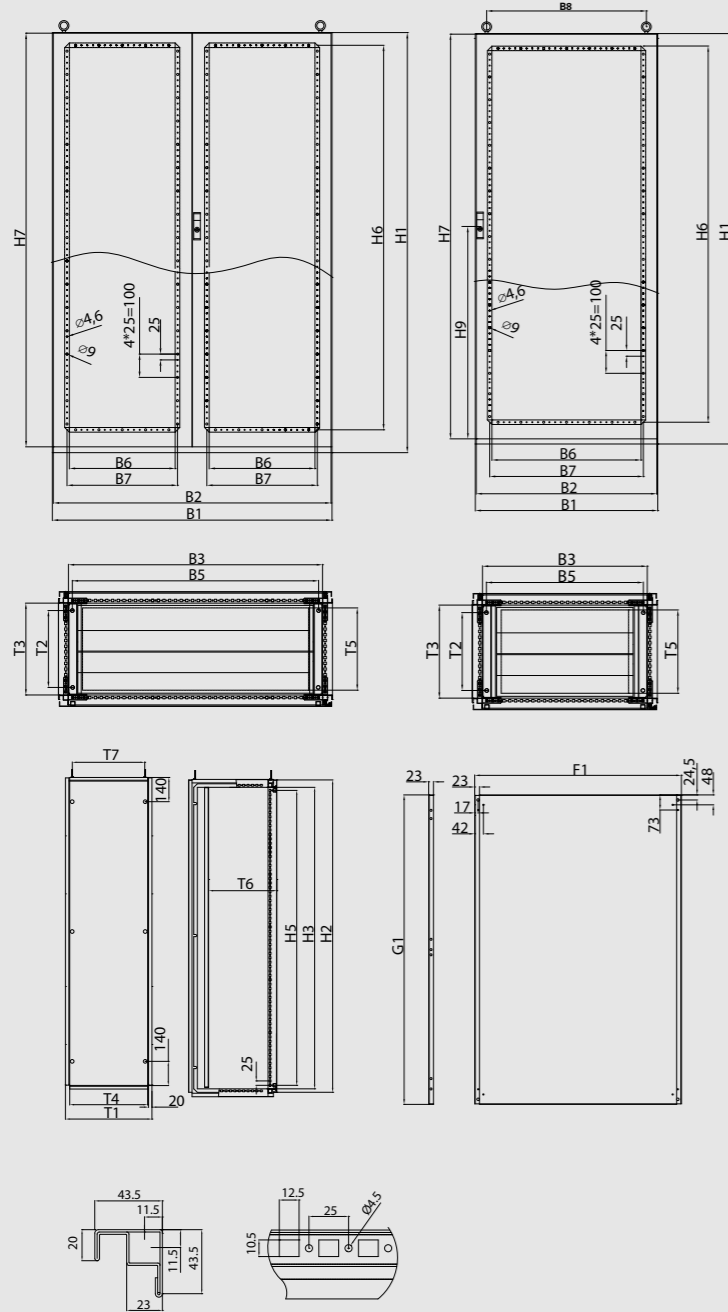

- B1: 总宽度
- B2: 门的宽度
- B3: 箱体框架内的净宽度
- B5: 成排穿孔横向嵌条的长度/连接箱底和底座的两边固定螺丝孔之间的距离
- B6: 箱门管状框架内的净宽度
- B7: 箱门框架两侧成排穿孔嵌条之间的距离
- B8: 两个吊环之间的距离
- B9: 箱底开缝宽度
- T1: 总深度
- T2: 箱底成排穿孔嵌条的长度/底座固定螺丝之间的距离
- T5: 箱底开缝的深度
- T6: 安装板深度, 从149mm开始以每格25mm的距离进行调节
- T7: 两个吊环中心点之间的距离
- H1: 总高度
- H2: 门和后背箱的高度
- H3: 箱底框架内的净高度
- H5: 成排穿孔的垂直嵌条之间的高度
- H6: 门框上下两根成排穿孔横嵌条间的高度
- H7: 门框内的净高度
- H8: 门框上下两个螺栓之间的距离
- H9: 门底到门锁中心点的距离
- F1: 安装板的总宽度
- G1: 安装板的总高度

- B1: Total width
- B2: Door width
- B3: Clear width inside cabinet frame
- B5: Length of row punching transverse insertion strip/distance between set screw holes on the two sides connecting cabinet bottom to the base
- B6: Clear width inside door tube frame
- B7: Distance between the row perforation insertion strips on the two sides of cabinet door frame
- B8: Distance between the two suspension loops
- B9: Width of slot on the bottom
- T1: Total depth
- T2: Length of row perforation insertion strips on the cabinet bottom /distance between set screws on the base
- T5: Depth of slot on the bottom
- T6: Depth of mounting plate, adjustable from 149mm at the step of 25mm per division
- T7: Distance between the central point of two suspension loops
- H1: Total height
- H2: Height of door and back plate
- H3: Clear width inside cabinet bottom frame
- H5: Distance between row perforation vertical insertion strips
- H6: Distance between the two row perforation transverse insertion strips at the top and bottom of door frame
- H7: Clear depth inside door frame
- H8: Distance between the two bolts at the top and bottom of door frame
- H9: Distance from door bottom to the central point of door lock
- F1: Total width of mounting plate
- G1: Total height of mounting plate

PC电脑柜系列
PC computer cabinet series



材料 Material	冷轧钢板、铝合金型材 Cold-roll steel sheet and aluminum alloy section
表面处理 Surface treatment	机柜磷化底涂处理, 外部为粉末涂层, 颜色RAL7035, 装饰条RAL5018两种织纹, 层板与柜体同色 Cabinet is applied with etch primer and covered with powder coating on the outer side, and its color is RAL7035. The color of decoration strips is RAL5018. Two textures are available. The color of laminated plate is identical with that of cabinet body
防护等级 Protection grade	IP54 (按GB4205-1993) IP54 (in accordance with GB4205-1993)
标准配置 Standard configuration	柜体、后门板、前上玻璃门、前下钢板门、键盘抽屉、密封条、层板、门锁、脚轮(可选) Cabinet body, back door plate, front upper glass door, front lower steel door, keyboard drawer, sealing strips, laminated plate, door lock and casters (optional)
钢板厚度 Plate thickness	装饰条: 铝合金 门板: 2.0mm 层板: 2.0mm 框架: 九折型材1.5mm Decoration strip: aluminum alloy Door plate: 2.0mm Laminated plate: 2.0mm Frame: nine-fold section 1.5mm

