


ES/BES系列尺寸规格表
ES/BES series dimension table

型号		宽度									高度									深度							安装版	
宽	高	深	B1	B2	B3	B5	B6	B7	B8	B9	H1	H2	H3	H5	H6	H7	H8	H9	T1	T2	T4	T5	T6	T7	F	G		
600	1600	400	599	592	512	475	455	475	535	428	1610	1575	1512	1475	1450	1430	1400	798	402	275	349	269	349	325	499	1496		
600	1600	500	599	592	512	475	455	475	535	428	1610	1575	1512	1475	1450	1430	1400	798	502	375	449	369	449	425	499	1496		
600	1800	400	599	592	512	475	455	475	535	428	1810	1775	1712	1675	1650	1630	1600	898	402	275	349	269	349	325	499	1696		
600	1800	500	599	592	512	475	455	475	535	428	1810	1775	1712	1675	1650	1630	1600	898	502	375	449	369	449	425	499	1696		
600	2000	500	599	592	512	475	455	475	535	428	2010	1975	1912	1875	1850	1830	1800	998	502	375	449	369	449	425	499	1896		
800	1600	500	799	792	712	675	655	675	735	628	1610	1575	1512	1475	1450	1430	1400	798	502	375	449	369	449	425	699	1496		
800	1800	400	799	792	712	675	655	675	735	628	1810	1775	1712	1675	1650	1630	1600	898	402	275	349	269	349	325	699	1696		
800	1800	500	799	792	712	675	655	675	735	628	1810	1775	1712	1675	1650	1630	1600	898	502	375	449	369	449	425	699	1696		
800	2000	500	799	792	712	675	655	675	735	628	2010	1975	1912	1875	1850	1830	1800	998	502	375	449	369	449	425	699	1896		
800	2000	600	799	792	712	675	655	675	735	628	2010	1975	1912	1875	1850	1830	1800	998	602	475	549	469	549	525	699	1896		
1000	1800	400	999	992	912	875	855	875	935	828	1810	1775	1712	1675	1650	1630	1600	898	402	275	349	269	349	325	699	1696		
1200	1600	500	1199	1192	1112	1075	1055	1075	1135	1028	1610	1575	1512	1475	1450	1430	1400	798	502	375	449	369	449	425	1099	1496		
1200	1800	400	1199	1192	1112	1075	1055	1075	1135	1028	1810	1775	1712	1675	1650	1630	1600	898	402	275	349	269	349	325	1099	1696		
1200	2000	500	1199	1192	1112	1075	1055	1075	1135	1028	2010	1975	1912	1875	1850	1830	1800	998	502	375	449	369	449	425	1099	1896		
1600	1800	400	1599	1592	1512	1475	1455	1475	1535	1428	1810	1775	1712	1675	1650	1630	1600	898	402	275	349	269	349	325	1499	1696		
1800	2000	500	1799	1792	1712	1675	1655	1675	1735	1628	2010	1975	1912	1875	1850	1830	1800	998	502	375	449	369	449	425	1699	1896		

ES/BES系列细节图
ES/BES Series Detail Drawing

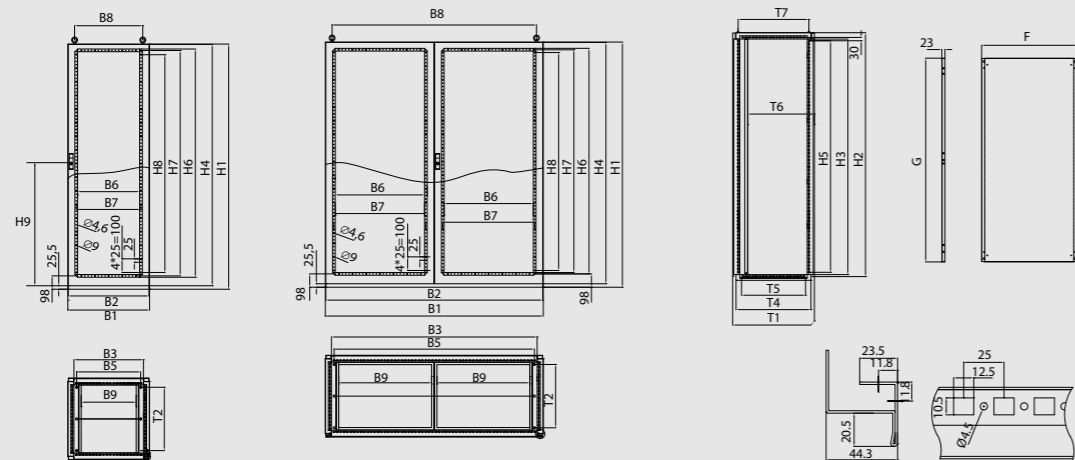


- B1: 总宽度
- B2: 门的宽度
- B3: 箱体框架内的净宽度
- B5: 成排穿孔横纵嵌条的长度/接连箱底和底座的两边固定螺丝孔之间的距离
- B6: 箱门管状框架内的净宽度
- B7: 箱门框架两侧成排穿孔嵌条之间的距离
- B8: 两个吊环之间的距离
- B9: 箱底开缝宽度
- T1: 总深度
- T2: 箱底成排穿孔嵌条的长度/底座固定螺丝之间的距离
- T3: 底框内的净深度
- T4: 底框深度
- T5: 箱底开缝的深度
- T6: 安装板深度, 从149mm开始以每格25mm的距离进行调节
- T7: 两个吊环中心点之间的距离
- H1: 总高度
- H2: 门和后背板的高度
- H3: 箱底框架内的净高度
- H5: 成排穿孔的垂直嵌条之间的高度
- H6: 门框上下两根成排穿孔横嵌条之间的高度
- H7: 门框内的净高度
- H8: 门框上下两个螺栓之间的距离
- H9: 门底到门锁中心点的距离
- F: 安装板的总宽度
- G: 安装板的总高度

- H3: Clear width inside cabinet bottom frame
- H5: Distance between row perforation vertical insertion strips
- H6: Distance between the two row perforation transverse insertion strips at the top and bottom of door frame
- H7: Clear depth inside door frame
- H8: Distance between the two bolts at the top and bottom of door frame
- H9: Distance from door bottom to the central point of door lock
- F: Total width of mounting plate
- G: Total height of mounting plate

KP组合柜系列
KP combined cabinet series



材料 Material	冷轧钢板 Cold-roll steel sheet
表面处理 Surface treatment	机柜磷化底涂处理, 外部为粉末涂层, 颜色可分RAL7032和RAL7035两种织纹, 安装板则为镀锌 Cabinet is applied with etch primer and covered with powder coating on the outer side. Two color textures, RAL7032 and RAL7035, are available. The mounting plate is galvanized.
防护等级 Protection grade	IP54 (按GB4205-1993) IP54 (in accordance with GB4205-1993)
标准配置 Standard configuration	前门、背板、安装板、柜体、密封条、门锁、侧板 (可选) Front door, back plate, mounting plate, cabinet body, sealing strip, door lock and side plate (optional)
钢板厚度 Plate thickness	框架: 九折型材1.5mm 门板: 2.0mm 背板、侧板: 1.5mm 安装板: 2.5mm Door plate: 2.0mm Back plate and side plate: 1.5mm Mounting plate: 2.5mm

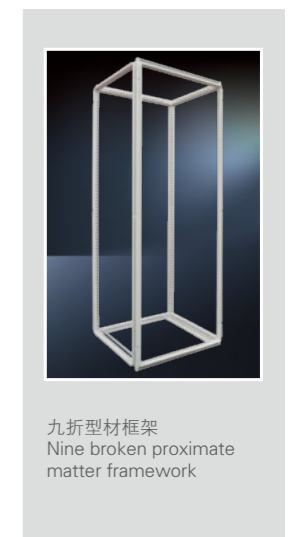

产品特点 Features of product

- 组合式电柜，适宜并柜使用
- 顶板可以移去，侧板可以拆卸，更易于工作的便捷性
- 门板离地很高，约25mm，确保开门灵活顺畅
- 独特的九折型材整体焊接而成的主体框架不但确保柜体的高强度而且使柜体的防护等级达到IP56
- 特殊的门板方管加强系统可以用螺丝固定在门板上，便于拆卸
- 框架上密布的25mm 间距模数孔确保安装的灵活性、通用性
- 镀锌安装板可以利用塑料滑块通过导轨从正面推入柜内，且两边有U型折边使安装板更牢固和更便于搬运

- Combined electric cabinet, suitable for combination
- The top plate is removable and the side plate is demountable, making work easier and simpler
- Ground clearance of door plate is sufficient, about 25mm, ensuring flexibility and smoothness of door opening.
- IP56The main body frame specially made of nine-fold section by means of whole welding not only ensures high strength of cabinet body but also lets the protection grade of cabinet body reach IP56.
- Special door plate square pipe reinforcement system can be fixed on the door plate with screws, easy for dismantlement.
- Module holes densely distributed at 25mm spacing on the frame guarantee the flexibility and universality of installation
- The mounting plate can be pushed into the cabinet from the front through guide rail by making use of plastic sliders. U-shape folded edges at the two sides facilitate fastening and handling of the mounting plate.

KP系列订货规格表

KP series order specification table

*可定制非标产品
Nonstandard products are customizable

序号 No.	柜体订货号(RAL7032) Order number of cabinet body (RAL7032)	侧板订货号(RAL7032) Order number of side plate (RAL7032)	柜体订货号(RAL7035) Order number of cabinet body (RAL7035)	侧板订货号(RAL7035) Order number of side plate (RAL7035)	宽 Width	高 Height	深 Depth
1	KP601840002	KP1840002	KP601840005	KP1840005	600	1800	400
2	KP801840002	KP1840002	KP801840005	KP1840005	800	1800	400
3	KP101840002	KP1840002	KP101840005	KP1840005	1000	1800	400
4	KP121840002	KP1840002	KP121840005	KP1840005	1200	1800	400
5	KP601850002	KP1850002	KP601850005	KP1850005	600	1800	500
6	KP801850002	KP1850002	KP801850005	KP1850005	800	1800	500
7	KP121850002	KP1850002	KP121850005	KP1850005	1200	1800	500
8	KP601860002	KP1860002	KP601860005	KP1860005	600	1800	600
9	KP801860002	KP1860002	KP801860005	KP1860005	800	1800	600
10	KP121860002	KP1860002	KP121860005	KP1860005	1200	1800	600
11	KP602040002	KP2040002	KP602040005	KP2040005	600	2000	400
12	KP802040002	KP2040002	KP802040005	KP2040005	800	2000	400
13	KP122040002	KP2040002	KP122040005	KP2040005	1200	2000	400
14	KP602050002	KP2050002	KP602050005	KP2050005	600	2000	500
15	KP802050002	KP2050002	KP802050005	KP2050005	800	2000	500
16	KP102050002	KP2050002	KP102050005	KP2050005	1000	2000	500
17	KP122050002	KP2050002	KP122050005	KP2050005	1200	2000	500
18	KP602060002	KP2060002	KP602060005	KP2060005	600	2000	600
19	KP802060002	KP2060002	KP802060005	KP2060005	800	2000	600
20	KP102060002	KP2060002	KP102060005	KP2060005	1000	2000	600
21	KP122060002	KP2060002	KP122060005	KP2060005	1200	2000	600
22	KP602080002	KP2080002	KP602080005	KP2080005	600	2000	800
23	KP802080002	KP2080002	KP802080005	KP2080005	800	2000	800
24	KP122080002	KP2080002	KP122080005	KP2080005	1200	2000	800
25	KP602260002	KP2260002	KP602260005	KP2260005	600	2200	600
26	KP802260002	KP2260002	KP802260005	KP2260005	800	2200	600
27	KP122260002	KP2260002	KP122260005	KP2260005	1200	2200	600

*KP系列细节图见47页 *See Page 47 for KP Series Detail Drawing

BKP不锈钢组合柜系列

BKP stainless steel combined cabinet series



材料 Material	SUS304 (其它材料型号可选)SUS304 (other material types are optional)
表面处理 Surface treatment	拉丝，安装板则为镀锌Wire drawing, and mounting plate is galvanized
防护等级 Protection grade	IP54 (按GB4205-1993) IP54 (in accordance with GB4205-1993)
标准配置 Standard configuration	前门、背板、安装板、柜体、密封条、门锁、侧板(可选件)Front door, back plate, mounting plate, cabinet body, sealing strip, door lock and side plate (optional)
钢板厚度 Plate thickness	框架：九折型材1.5mm 门板：2.0mm 背板、侧板：1.5mm 安装板：2.5mm Frame: nine-fold section 1.5mm Door plate: 2.0mm Back plate and side plate: 1.5mm Mounting plate: 2.5mm



限位器/铰链/加强方管
Stopper/hinge/
reinforced square pipe



固定底座
Fixing base



不锈钢三通连接件
Stainless steel three-way
connection
element